


The digital control for all automated operators

- Backlit with blue light, available in the surface-mounted or recess-mounted version.
- Cover in RAL 7024 grey colour.
- 12-key keypad for extra security.
- Transponder selector for Manchester-type cards and keyfobs.
- Bluetooth selector with CAME AUTOMATIONBT APP free for IOS and Android.



Dimensions (mm)

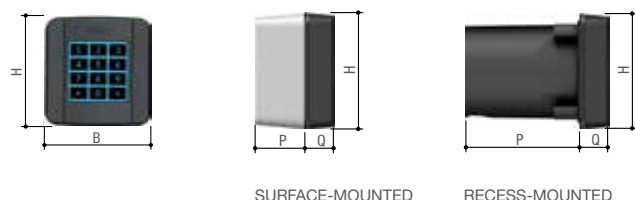

SURFACE-MOUNTED

RECESS-MOUNTED

Dimensions table (mm)

MODELS	TYPE	MOUNTING	B (mm)	H (mm)	P (mm)	Q (mm)	P + Q (mm)
806SL-0150	HARDWIRED KEYPAD	SURFACE-MOUNTED	70,5	73,5	33,5	16,5	50
806SL-0160	HARDWIRED KEYPAD	RECESS-MOUNTED	70,5	73,5	76	16,5	92,5
806SL-0170	RADIO-BASED KEYPAD	SURFACE-MOUNTED	70,5	73,5	33,5	16,5	50
806SL-0180	RADIO-BASED KEYPAD	SURFACE-MOUNTED	70,5	73,5	33,5	16,5	50
806SL-0110	TRANSPONDER	SURFACE-MOUNTED	70,5	73,5	33,5	16,5	50
806SL-0120	TRANSPONDER	RECESS-MOUNTED	70,5	73,5	76	16,5	92,5
806SL-0210	BLUETOOTH	SURFACE-MOUNTED	70,5	73,5	33,5	16,5	50
806SL-0240	BLUETOOTH	SURFACE-MOUNTED	70,5	73,5	33,5	16,5	50
806SL-0250	BLUETOOTH	SURFACE-MOUNTED	70,5	73,5	33,5	16,5	50

Technical characteristics

MODELS	806SL-0170	806SL-0180	806SL-0150	806SL-0160	806SL-0110	806SL-0120	806SL-0210	806SL-0240	806SL-0250
Protection rating (IP)	54	54	54	54	54	44	54	54	54
Power supply (V)	-	-	-	-	-	-	12 - 24 AC - DC	12 - 24 AC - DC	12 - 24 AC - DC
Power (W)	0.144	0.144	0.6	0.6	0.83	0.83	0,7	0,7	0,7
Battery capacity (mAh)	1600	1600	-	-	-	-	-	-	-
Max. rating of 24 V (A) relay contacts	-	-	-	-	-	-	1	1	1
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20° ÷ +55°	-20° ÷ +55°	-20° ÷ +55°

● 12 - 24 V AC - DC

Code	Description
------	-------------

433.92 MHz keypad radio selectors

806SL-0170	SELT1W4G - 433.92 MHz surface-mounted, 12-key radio keypad selector, with blue backlight, 25 savable codes and password to access the programming mode. Settable in Rolling Code or Fixed Code mode. RAL7024 Gray color.
-------------------	---



868.35 MHz keypad radio selectors

806SL-0180	SELT1W8G - 868.35 MHz surface-mounted, 12-key radio keypad selector, with blue backlight, 25 savable codes and password to access the programming mode. Settable in Rolling Code or Fixed Code mode. RAL7024 Gray color.
-------------------	---



Bluetooth digital selectors

806SL-0210	SELB1SDG1 - Surface-mounted Bluetooth selector for 15 users with blue backlighting. RAL7024 Gray color.
-------------------	--



806SL-0240	SELB1SDG2 - Surface-mounted Bluetooth selector for 50 users with blue backlighting. RAL7024 Gray color.
-------------------	--



806SL-0250	SELB1SDG3 - Surface-mounted Bluetooth selector for 250 users with blue backlighting. RAL7024 Gray color.
-------------------	---



Transponder sensors

806SL-0110	SELR1NDG - Surface-mounted transponder selector for cards, keyfobs and TAG (Manchester protocol) with blue backlighting. RAL7024 Gray color.
-------------------	---



806SL-0120	SELR2NDG - Recess-mounted transponder selector for cards, keyfobs and TAG (Manchester protocol) with blue backlighting. RAL7024 Gray color.
-------------------	--



Keypad selectors

806SL-0150	SELT1NDG - Surface-mounted keypad selector, with 12 keys and backlighting. RAL7024 Gray color.
-------------------	---



806SL-0160	SELT2NDG - Recess-mounted keypad selector, with 12 keys and backlighting. RAL7024 Gray color.
-------------------	--



DOWNLOAD the CAME AutomationBT APP



AutomationBT is CAME's new app for Bluetooth selectors that lets you control your automated operators via smartphone. Activate the location service, receive alerts and open the gate. The Keyless function lets you even do it automatically.