

## The command for all operators

- Safe and reliable thanks to the electronic anti-tampering system.
- Even with radio technology when cabling is not possible.
- In aluminium and stainless steel to provide resistance, reliability and durability over time.



### Dimensions (mm)

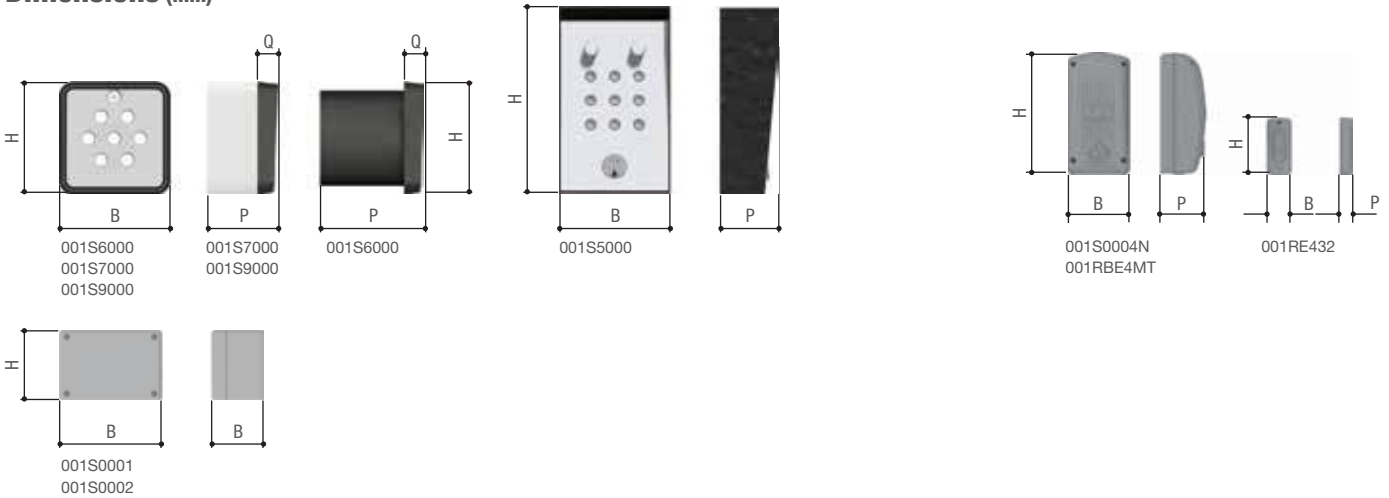


Table of dimensions (mm)

MODELS	MOUNTING	B (mm)	H (mm)	D (mm)	Q (mm)
S5000 *	SURFACE-MOUNTABLE	80	130	40	-
S6000 *	FLUSH-MOUNTABLE	70	70	73	13
S7000 *	SURFACE-MOUNTABLE	70	70	31	13
S9000	SURFACE-MOUNTABLE	70	70	31	13
S0001 • S0002	SURFACE-MOUNTABLE	124	84	62	-
RE432	SURFACE-MOUNTABLE	46	108	23	-
RBE4MT	SURFACE-MOUNTABLE	104	224	87	-
S0004N	SURFACE-MOUNTABLE	104	224	87	-

\* POWER SUPPLY FROM S0001 • S0002 • S0004N - ● 12 - 24 V AC - DC

### Technical features

MODELS	S5000	S6000	S7000	S9000
Protection rating (IP)	54	54	54	54
Power supply (V)	12 - 24 AC - DC *	12 - 24 AC - DC *	12 - 24 AC - DC *	1 GP23A 12 V DC BATTERY
Combinations	16,777,216	1,679,616	1,679,616	1,562,500
Radio signal frequency (MHz)	-	-	-	433.92
Code digits	8 Max.	6 Max.	6 Max.	8 Max.
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55
Material	ALUMINIUM - STEEL	ALUMINIUM - STEEL	ALUMINIUM - STEEL	ALUMINIUM - STEEL

\* POWER SUPPLY FROM S0001 • S0002 • S0004N